



**MODEL:** HSB14-353518 | **DESCRIPTION:** HEAT SINK

**FEATURES**

- BGA design
- top mount
- aluminum alloy
- black anodized finish




**MODEL**

	thermal resistance <sup>1</sup>				power dissipation <sup>1</sup> @ 75°C ΔT, nat conv [W]
	@ 75°C ΔT, nat conv [°C/W]	@ 1 W, nat conv [°C/W]	@ 1 W, 200 LFM [°C/W]	@ 1 W, 400 LFM [°C/W]	
HSB15-404010	11.84	14.8	3.9	2.6	6.33

Note: 1. See performance curves for full thermal resistance details.

**PERFORMANCE CURVES**

Power (W)	Heatsink Temperature Rise Above Ambient (ΔT = T <sub>hs</sub> - T <sub>a</sub> ) [°C]		
	Natural Conv.	200 LFM	400 LFM
0	0	0	0
1	14.8	3.9	2.6
2	28.2	7.5	5.0
3	40.7	11.4	7.5
4	52.3	15.2	10.0
5	62.0	19.0	12.5
6	72.5	23.0	15.0
7	82.3	26.6	17.4
8	91.1	30.6	20.0
9	100.7	34.5	22.5
10	109.6	38.5	25.0

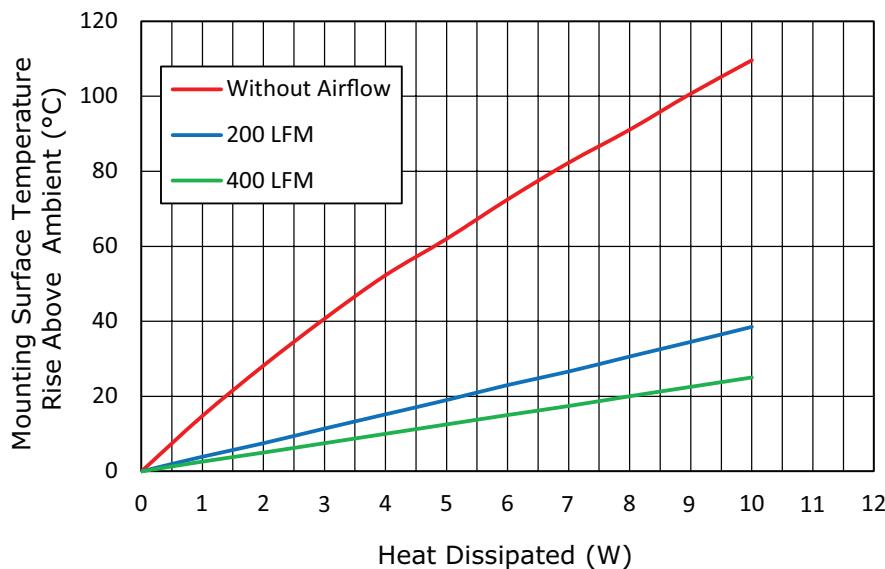

T<sub>hs</sub>: "hot spot" temperature measured on the heatsink  
 T<sub>a</sub>: ambient temperature

## MECHANICAL DRAWING

units: mm  
tolerance:  $\pm 0.38$  mm

MATERIAL	AL 6063-T5
FINISH	black anodized
WEIGHT	15.0 g

